


MANUAL WATER SOFTENER LT5



TECHNICAL DATA

Height A	mm 300
Weight	Kg 5
Supply water pressure	min 1 bar, max 8 bar
Maximum flow rate recommended	1000 l/h
Room temperature	min 4°C - max 25°C
Salt content per regeneration	0,5 kg

WATER NETWORK CONNECTIONS

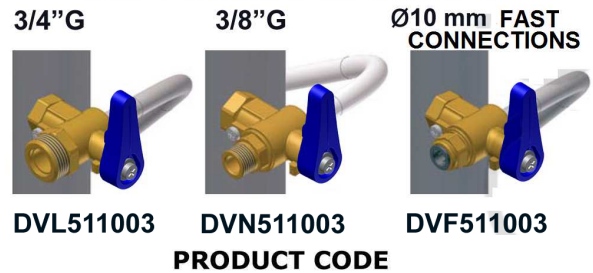

PRODUCT CODE

SUPPLY WATER CHARACTERISTICS

- Drinking water
- Temperature: min 4°C - max 25°C
- Crystal-clear water (SDI 1)
- Maximum hardness 90°f

THE PACKAGING CONTAINS:

- 1 steel AISI 304 cylinder holding 5 litres
- 3.5 litres of cationic resins adapt for softening
- 1 instruction manual
- 1 unloading pipe

LITRES OF SOFTENED WATER ACCORDING TO ITS HARDNESS						
°f	20	30	40	50	60	CYCLIC CAPACITY [m ³ ·°f]
°d	11	16	22	28	33	
ppm CaCO ₃	200	300	400	500	600	
	1050	700	525	420	350	21.0

THE WATER SOFTENER IS SUITED FOR:

